



surelight

Neon light Square Range Specification

NE-SQ-HB & NE-SQ-VB

NE-SQ-VB



NE-SQ-HB



Table of Contents

Introduction	03
1. Specifications & Parameters	04
1.1 Dimensions of Light	
1.2 Technical Parameters	
1.3 Optical Parameters	
2. Functions & Features	05
2.1 Product Features	
2.2 Minimum Bend Diameter	
3. Types of Connector	05
3.1 Injection-moulded Connector	
3.2 Dual Injection-moulded Connector	
3.3 Clasp Connector	
3.4 Snap Connector	
3.5 Swivel Connector	
3.6 Anti-wicking Ferrule	
3.7 Male & Female Connector	
	11
4. Mounting Profile	
4.1 Standard Aluminum Profile	
4.2 Plastic Profile	
4.3 Self-locking Aluminum Profile Ver	
4.4 Self-locking Aluminum Profile Ver. 2	
4.5 Plastic & Aluminum Combination Profile	
4.6 Cable Exit Oriented Aluminum Profile	
(Applicable to Injection-moulded Connector Only)	
4.7 Corner Aluminum Profile	
(Applicable to Injection-moulded Connector Only)	
4.8 Curve Stainless Steel Profile	
5. Packaging	16
6. Appendix	17
6.1 Product Naming Convention	
6.2 Certificate	
6.3 Third-Party Test Report	
6.4 Reliability Test of Light	
6.5 Figures of Typical Characteristics	
6.6 (X,Y) Chromaticity Diagram	
6.7 Wavelength of Colour Light	
6.8 Correlated Colour Temperature	
6.9 Loading Chart	

Introduction

NE-SQ is a member of the Artist of Light series with monochromatic light to achieve your desired artistic effect, which employs constant current design-eliminating linear fade.

Built-in protection circuit design which means single LED failure has no effect on other LEDs working in the same unit and the whole light can keep constant lighting.

NE-SQ is UL/cUL, CE, TUV and RoHS compliant. Moreover, it has passed environmental resistance, optical, mechanical and electrical tests in our lab under the support of advanced experimental equipment and technology to ensure it meets the requirements of harsh environments.


Fully encapsulated in the flexible PVC chamber by utilizing consummate extrusion technology, assembled with multiple patent connectors to achieve IP68 protection. Easy for installation and applicable for various circumstances.

NE-SQ features particularly high luminous flux with homogeneous illumination and small bend diameter in both horizontal and vertical bending direction.

Applications:


1. Outdoor or Indoor Contour/Border Lighting
2. Architectural Outline/Decorative Lighting
3. Cove/Accent Lighting
4. Facade/Terrace Floor Lighting
5. Display Lighting

1. Specifications & Parameters


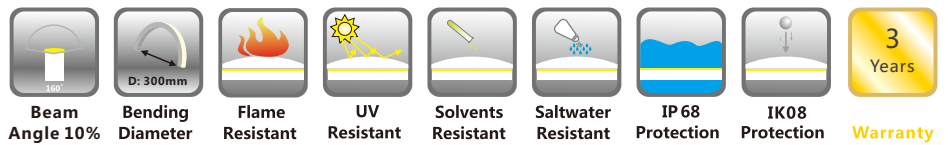


1.1 Dimensions of Light

NE-SQ-VB



NE-SQ-HB

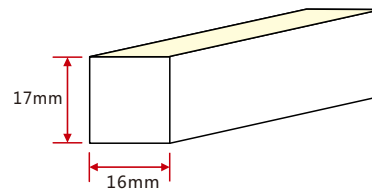

Note: Unless otherwise stated, the tolerance of the light is $\pm 0.3\text{mm}$.

1.2 Technical Parameters

Technical Parameters


Article No.	NE-SQ-XX	NE-SQ-XX	NE-SQ-XX
Colour	Red/Amber	Green/Blue	White
Working Voltage	DC24V	DC24V	DC24V
Rated Power/m	7.2W	12W	12W
LED Qty/m	108LEDs	108LEDs	108LEDs
LED Distance	9.26mm	9.26mm	9.26mm
Min. Cutting Unit	9LEDs (1unit)	6LEDs (1unit)	6LEDs (1unit)
Min. Cutting Length	83.3mm(1unit)	55.6mm(1unit)	55.6mm(1unit)
Continuous Length	15m	10m	10m
Weight/m	325g		
Storage Temperature	-20~60°C		
Environmental Working Temperature	-20~45°C		
Environmental Installation Temperature	0~45°C		
IP Rating	IP68		

1.3 Optical Parameters


Photometric Data

Article No.	NE-SQ-XX		Article No.	NE-SQ-XX	
LED Type	SMD		LED Type	SMD	
Beam Angle 10%	160°		Beam angle	160°	
Colour	Wavelength	Lumen/m	Colour	CCT	Lumen/m
Red	620-630nm	>130lm	2500K	2460 \pm 120K	>420lm
Green	520-530nm	>300lm	2700K	2725 \pm 145K	>420lm
Blue	465-475nm	>50lm	3000K	3045 \pm 175K	>420lm
Amber	585-595nm	>130lm	3500K	3465 \pm 245K	>480lm
			4000K	3985 \pm 275K	>480lm
			4500K	4503 \pm 243K	>480lm
			5000K	5029 \pm 283K	>480lm
			5700K	5669 \pm 355K	>450lm
			6500K	6532 \pm 510K	>450lm

Candle power distribution



Illuminance Characteristics




2. Functions & Features

2.1 Product Features


1. High quality SMD LED chip.
2. Protection Circuit: Each LED Protected.
3. UV & flame resistant construction(PVC).
4. Extremely flat profile for slimline projects.
5. Perfect uniform & even light source with invisible light dots.
6. High illumination.
7. Easily to be installed.
8. High IP rating (IP68)
9. The product IP rate is ultimately in line with properly applied IP rated connectors.
10. Continuous length up to 15m (R, A)/10m (G, B, W) by powering one end.
11. Environmentally friendly & energy efficient.
12. Automated production, high reliability & long warranty.
13. 5 years life span.
14. CRI-90 Available upon request

2.2 Minimum Bend Diameter

NE-SQ-VB

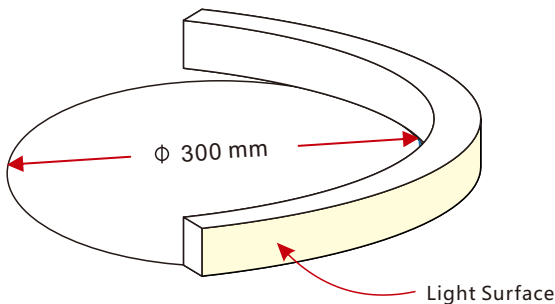

NE-SQ-HB

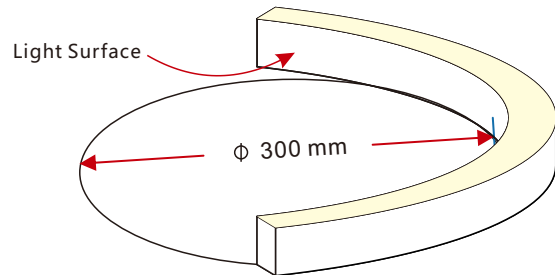

The light can only be bent along the light surface. Do not bend smaller than allowed minimum bend diameter.

3. Types of Connector


3.1 Injection-moulded Connector


Note: Unless otherwise stated, the tolerance of the connector is $\pm 0.5\text{mm}$.



Injection-moulded Front Connector (bottom)



Connects light to power supply with pre-installed bottom feed cable IP67. Available in 0.3m, 1m, 3m, 5m, 10m, 15m, 20m lengths.

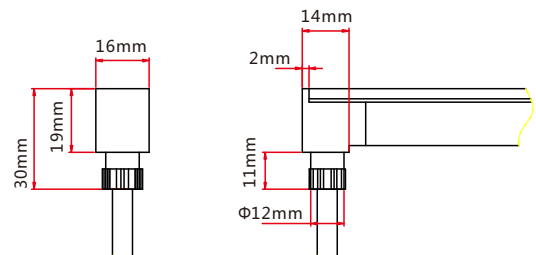





Injection-moulded Front Connector (side)

Connects light to power supply with pre-installed side feed cable, IP67. Available in 0.3m, 1m, 3m, 5m, 10m, 15m, 20m lengths.

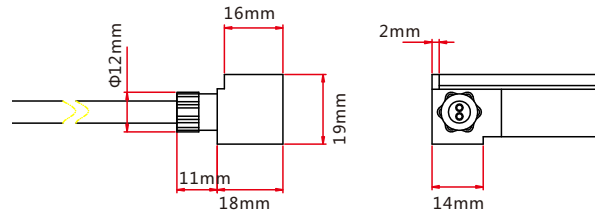



Injection-moulded Front Connector (end)

Connects light to power supply with pre-installed end feed cable, IP67. Available in 0.3m, 1m, 3m, 5m, 10m, 15m, 20m lengths.

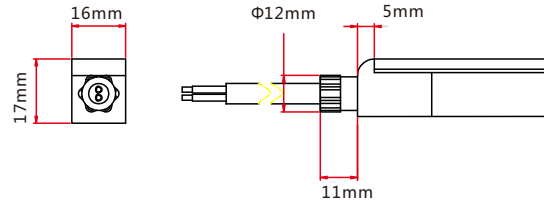



Injection-moulded Middle Feed Connector

Connects light to power supply with pre-installed end feed cable, IP67. Available in 0.3m, 1m, 3m, 5m, 10m, 15m, 20m lengths.

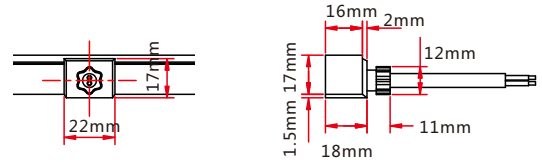

Injection-moulded End Cap


Pre-installed termination protection of the light, IP67.

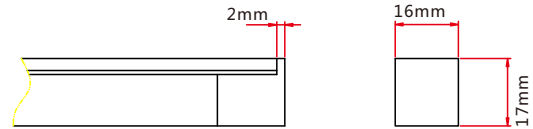

Injection-moulded Jumper

Connects two pieces of lights together with a flexible cable. IP67 Injection-moulded connector. L available in 0.3~1m.


Maximum 8 Jumpers in 20m
Maximum 4 Jumpers in 10m



Injection-moulded T-feed


Connects two pieces of lights together with a T joint, energized from middle. IP67 Injection-moulded connector. L1 and L2 available in 0.15~0.5m. L3 available in 0.3~3m.

Maximum 8 T-feeds in 20m
Maximum 4 T-feeds in 10m

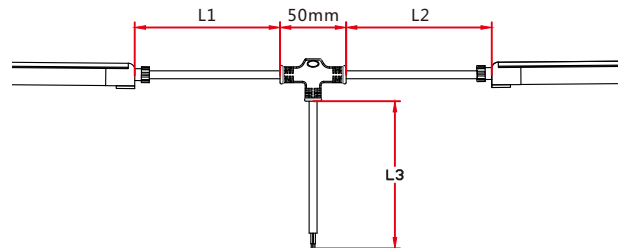



3.2 Dual Injection-moulded Connector

Note: Unless otherwise stated, the tolerance of the connector is $\pm 0.5\text{mm}$.





Dual Injection-moulded Front Connector (bottom)

Connects light to power supply with pre-installed bottom feed cable, IP68. Cable length available in 0.3m, 1m, 3m, 5m, 10m, 15m, 20m.

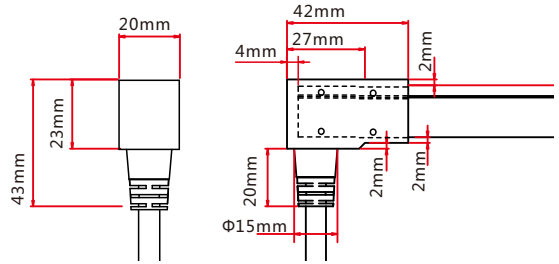



Dual Injection-moulded Front Connector (side)

Connects light to power supply with pre-installed side feed cable, IP68. Cable length available in 0.3m, 1m, 3m, 5m, 10m, 15m, 20m.

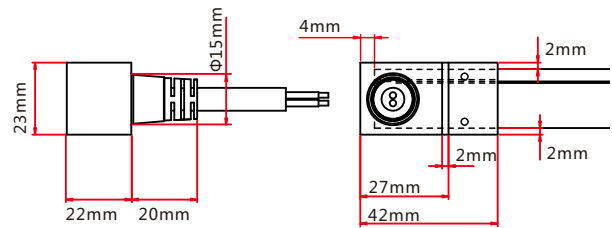



Dual Injection-moulded Front Connector (top end)

Connects light to power supply with pre-installed end feed cable, IP68. Cable length available in 0.3m, 1m, 3m, 5m, 10m, 15m, 20m.

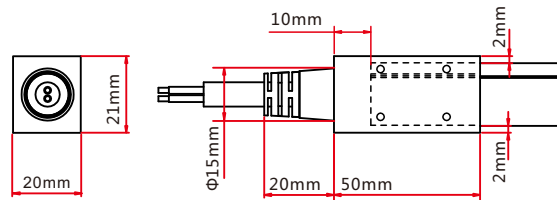

Dual Injection-moulded End Cap


Pre-installed termination protection of the light, IP68.

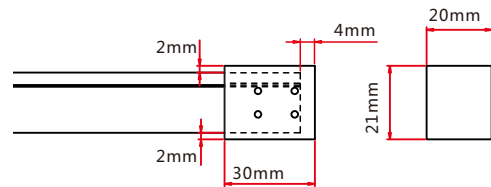

Dual Injection-moulded Jumper

Connects two pieces of lights together with a flexible cable. IP68 Dual Injection-moulded connector. L available in 0.3~1m.


Maximum 8 Jumpers in 20m
Maximum 4 Jumpers in 10m

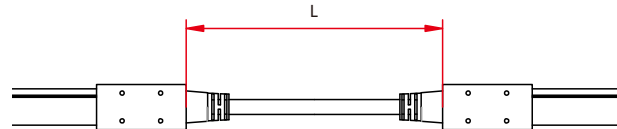

Dual Injection-moulded T-feed


Connects two pieces of lights together with a T joint, energized from middle. IP68 Dual Injection-moulded connector. L1 and L2 available in 0.15~0.5m. L3 available in 0.3~3m.

Maximum 8 T-feeds in 20m
Maximum 4 T-feeds in 10m

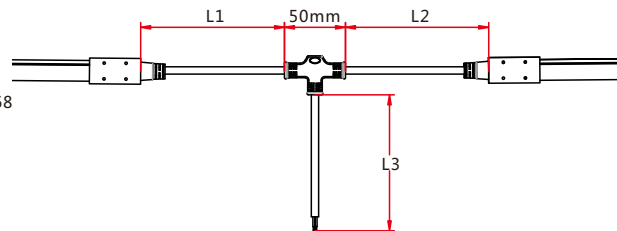

3.3 Clasp Connector



Note: Unless otherwise stated, the tolerance of the connector is $\pm 0.5\text{mm}$.



Clasp Front Connector

Connects light to power supply, IP67 DIY connector. Cable available in 0.3m, 1m, 3m, 5m, 10m, 15m, 20m lengths.



- Feed connector with silicone gasket *1 (Two-pin)
- Anti-skidding clip *1
- U steel plate *1

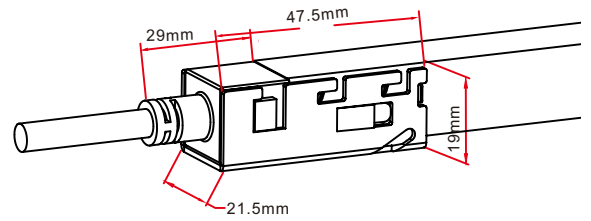

Clasp End Cap

Termination protection of the light, IP67 DIY connector.



- Tail plug *1
- Silicone gasket *1
- Anti-skidding clip *1
- U steel plate *1

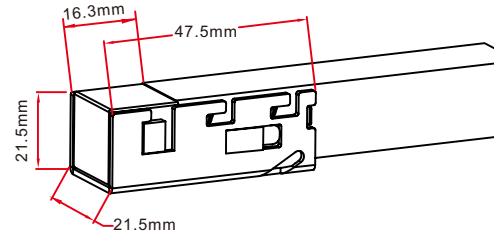

Clasp Jumper

Connects two pieces of lights together with a flexible cable. IP67 DIY connector. L available in 0.3m, 1m and 3m.


- Double-end feed connector*1 (Two-pin)
- Silicone gasket*2
- U steel plate*2
- Anti-skidding clip*2

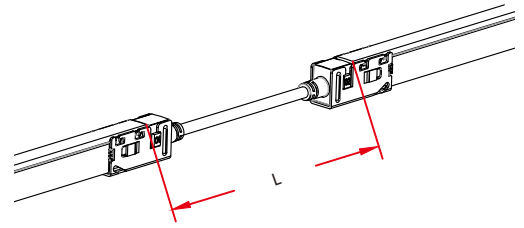

Clasp Power T-feed


Connects two pieces of lights together with a T joint, energized from middle. IP67 DIY connector. L1 and L2 available in 0.3m.

- T joint*1 (Two-pin)
- Silicone gasket*2
- U steel plate*2
- Anti-skidding clip*2

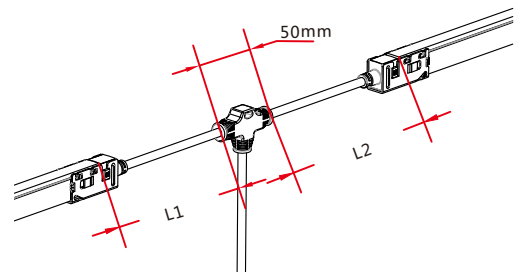

3.4 Snap Connector



Note: Unless otherwise stated, the tolerance of the connector is $\pm 0.5\text{mm}$.



Snap Front Connector(top end)

Connects light to power supply, IP67 DIY connector. Cable available in 0.3m, 1m, 3m, 5m, 10m, 15m, 20m lengths.



Feed connector with silicone gasket *1
(Two-pin)
Anti-skidding clip *1
U steel plate *1
PC Cover *1

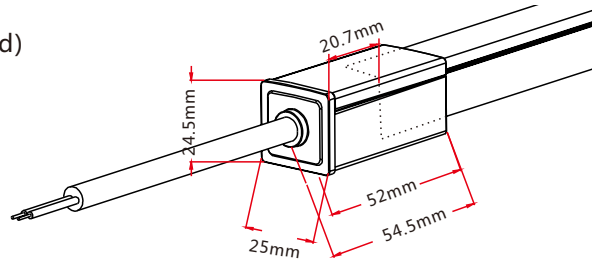

Snap Front Connector(side right/left)

Connects light to power supply, IP67 DIY connector. Cable available in 0.3m, 1m, 3m, 5m, 10m, 15m, 20m lengths.


Feed connector with silicone gasket *1
(Two-pin)
Anti-skidding clip *1
U steel plate *1
PC Cover *1

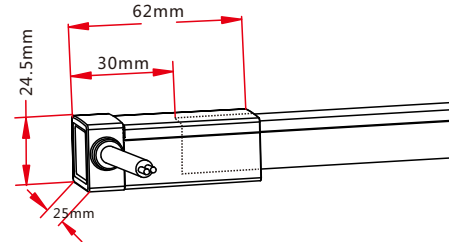

Snap Front Connector(bottom)

Connects light to power supply, IP67 DIY connector. Cable available in 0.3m, 1m, 3m, 5m, 10m, 15m, 20m lengths.



Feed connector with silicone gasket *1
(Two-pin)
Anti-skidding clip *1
U steel plate *1
PC Cover *1

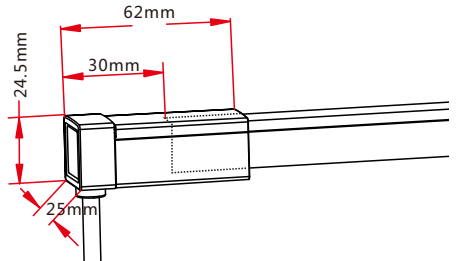

Snap End Cap

Termination protection of the light, IP67 DIY connector.


Tail plug with silicone gasket *1
Anti-skidding clip *1
U steel plate *1
PC Cover *1

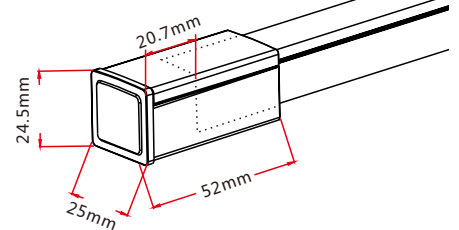

Snap Jumper

Connects two pieces of lights together with a flexible cable. IP67 DIY connector. L available in 0.3m, 1m and 3m.


Double-end feed connector*1 (Two-pin)
Silicone gasket*2
U steel plate*2
Anti-skidding clip*2
PC cover*2

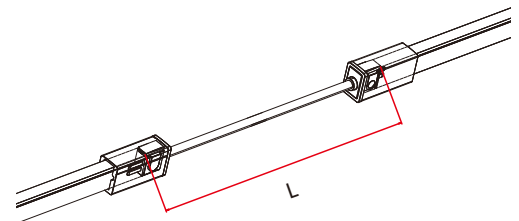

Snap Power T-feed


Connects two pieces of lights together with a T joint, energized from middle. IP67 DIY connector. L1 and L2 available in 0.3m.

T joint*1 (Two-pin)
Silicone gasket*2
U steel plate*2
Anti-skidding clip*2
PC cover*2

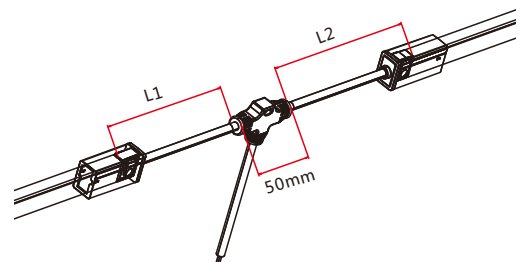



3.5 Swivel Connector

Note: Unless otherwise stated, the tolerance of the connector is $\pm 0.5\text{mm}$.




Swivel Front Connector (top end)

Connects light to power supply. IP20 DIY connector. Cable length available in 0.3m, 1m.

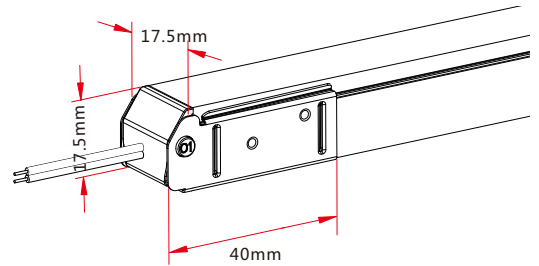


Swivel End Cap

Termination protection of the light, IP20 DIY connector.

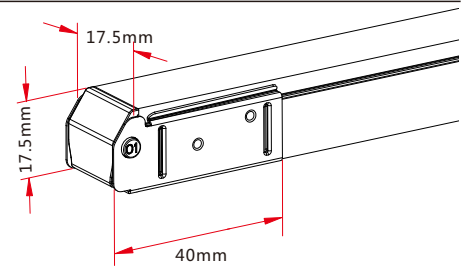

3.6 Anti-wicking Ferrule


Note: Unless otherwise stated, the tolerance is $\pm 0.5\text{mm}$.



Anti-wicking Ferrule


The anti-wicking ferrule is located at 115mm ($\pm 5\text{mm}$ tolerance) from the connector on the cable.

For protection against water ingress from inside of cable wire and hence damage the light.

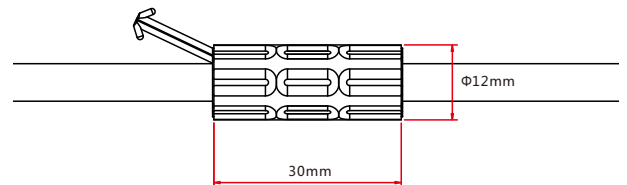


3.7 Male & Female Connector

Note: Unless otherwise stated, the tolerance is $\pm 2\text{mm}$.





Male & female Connector

For plug and play cable junction, DIY or Pre-installed connector, IP68




4. Mounting Profile

4.1 Standard Aluminum Profile

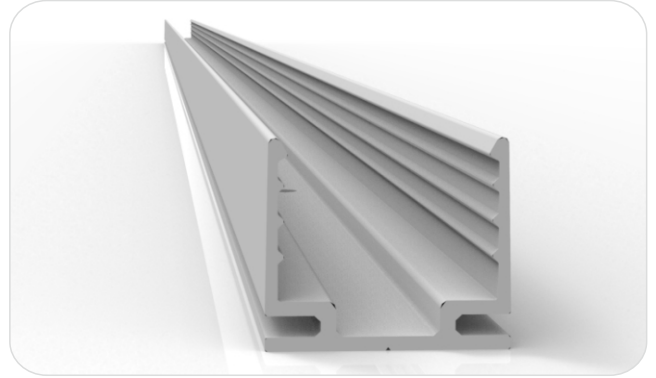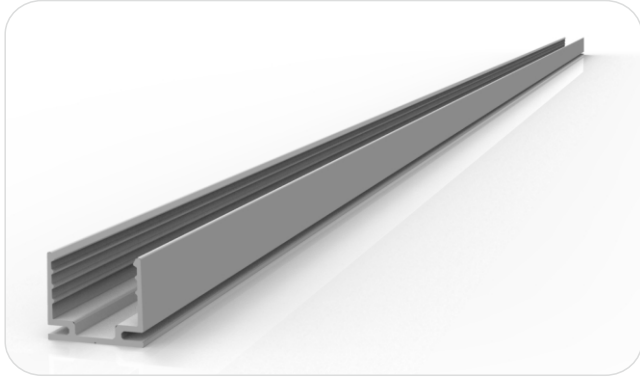


Dimensions Note: Unless otherwise stated, the tolerance of the profile is $\pm 0.5\text{mm}$.

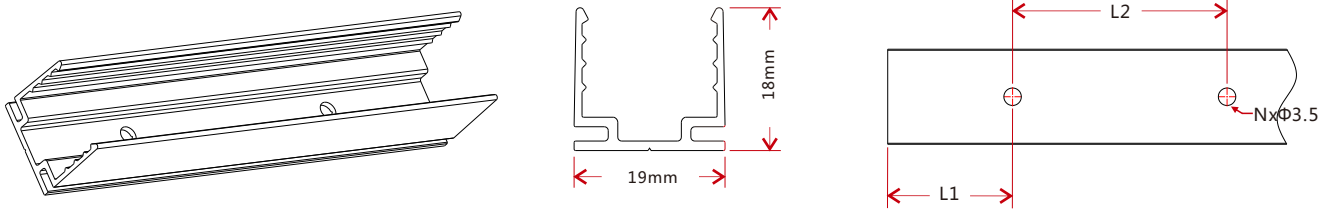

Model	W*H(mm)	Standard Length (mm)	L1 (mm)	L2 (mm)	Screw Hole (mm)	Hole Number	For Product
NE-SQ-CH	19*18	35	17.5	/	$\Phi 3.5$	1	SQ
		500	50	200	$\Phi 3.5$	3	SQ
		1000	100	200	$\Phi 3.5$	5	SQ
		2000	100	200	$\Phi 3.5$	10	SQ






4.2 Plastic Profile

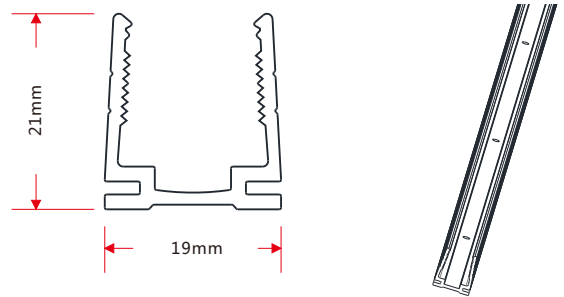



Note: Unless otherwise stated, the tolerance of the profile is $\pm 0.5\text{mm}$.

Model	W*H(mm)	Standard Length (mm)	L1 (mm)	L2 (mm)	Screw Hole (mm)	Hole Number	For Product
NE-SQ-CH	19*21	500	50	200	$\Phi 3.5$	3	SQ
		1000	100	200	$\Phi 3.5$	5	SQ
		2000	100	200	$\Phi 3.5$	10	SQ

4.3 Self-locking Aluminum Profile (Using with the Clip)


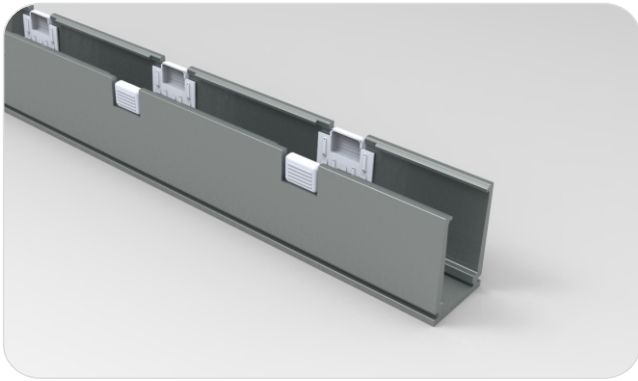


Note: Unless otherwise stated, the tolerance of the profile is $\pm 0.5\text{mm}$.

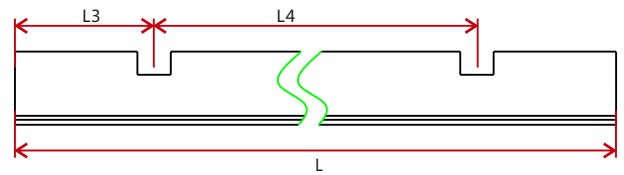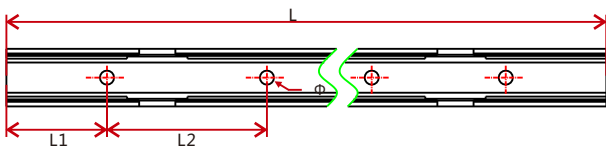


Model	W*H(mm)	Standard Length(mm)	L1(mm)	L2(mm)	L3(mm)	L4(mm)	Hole Screw(mm)	Hole Number	Clip Number
NE-SQ-CH	20.5*20	35	17.5	25	5	/	$\Phi 3.5$	2	1
		500	50	200	75	350	$\Phi 3.5$	3	2
		1000	100	200	150	350	$\Phi 3.5$	5	3
		2000	100	200	125	350	$\Phi 3.5$	10	6

4.4 Self-locking Aluminum Profile Ver. 2 (Using with the Clip)





Note: Unless otherwise stated, the tolerance of the profile is $\pm 0.5\text{mm}$.

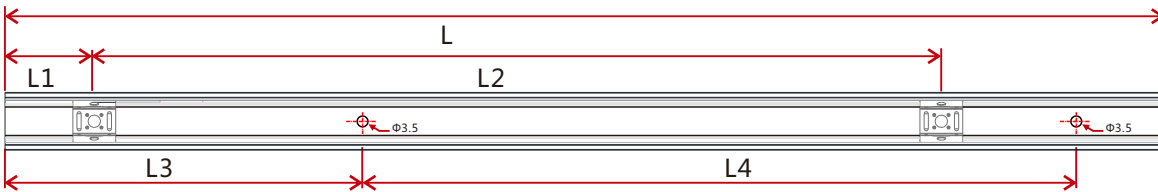

Model	W*H(mm)	Standard Length(mm)	L1(mm)	L2(mm)	L3(mm)	L4(mm)	Hole Screw(mm)	Hole Number	Clip Number
NE-SQ-CH	20.7*22.3	35	17.5	/	5	25	$\Phi 3.5$	2	1
		500	25	150	50	200	$\Phi 3.5$	3	4
		1000	25	190	100	200	$\Phi 3.5$	5	6
		2000	25	195	100	200	$\Phi 3.5$	10	11

4.5 Plastic & Aluminum Combination Profile


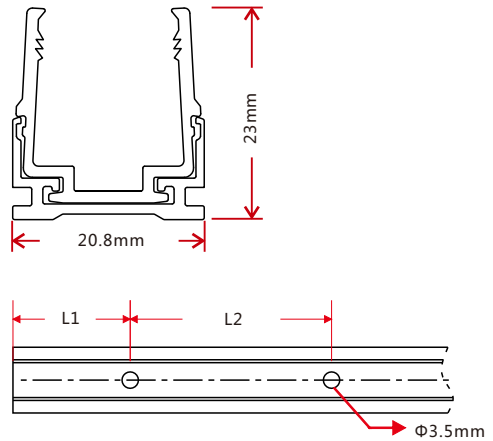
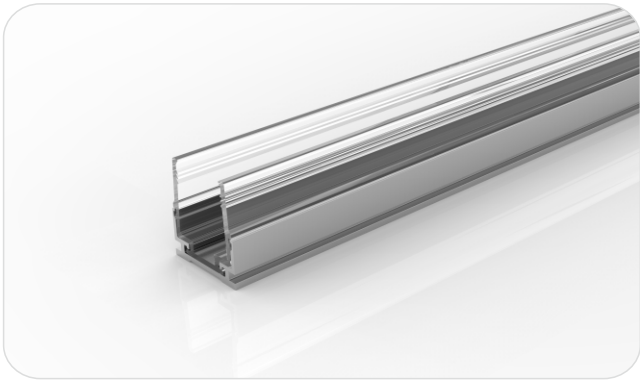


Note: Unless otherwise stated, the tolerance of the profile is ±0.5mm.

Model	W*H(mm)	Standard Length (mm)	L1 (mm)	L2 (mm)	Screw Hole (mm)	Hole Number	For Product
NE-SQ-CH	20.8*23	35	17.5	/	Φ3.5	1	SQ
		500	50	200	Φ3.5	3	SQ
		1000	100	200	Φ3.5	5	SQ
		2000	100	200	Φ3.5	10	SQ

4.6 Cable Exit Oriented Aluminum Profile (Applicable to Injection-moulded Connector Only)




4.6.1 Self-locking Aluminum Profile Ver. 2, Bottom Feed (Using with the Clip)

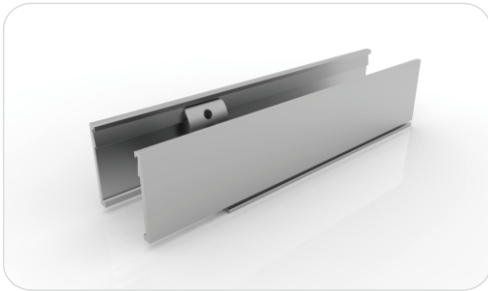

Model: NE-SQ-CH

Note: Unless otherwise stated, the tolerance of the profile is ±0.5mm.


4.6.2 Self-locking Aluminum Profile Ver. 2, Middle Feed (Using with the Clip)

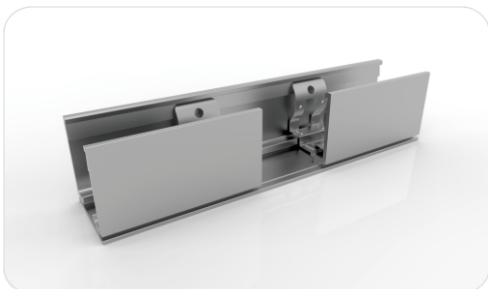

Model: NE-SQ-CH



Note: Unless otherwise stated, the tolerance of the profile is ±0.5mm.

4.6.3 Self-locking Aluminum Profile Ver. 2, Side Feed From Left (Using with the Clip)

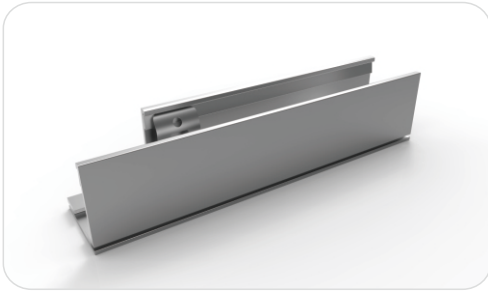


Model: NE-SQ-CH

Note: Unless otherwise stated, the tolerance of the profile is $\pm 0.5\text{mm}$.





4.6.4 Self-locking Aluminum Profile Ver. 2, Side Feed From Right (Using with the Clip)

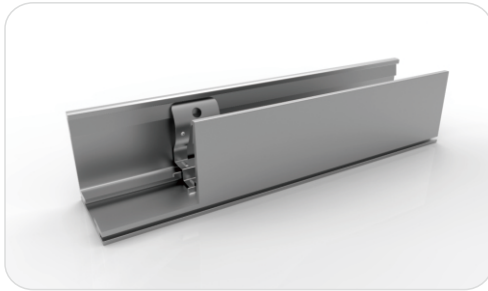


Model: NE-SQ-CH

Note: Unless otherwise stated, the tolerance of the profile is $\pm 0.5\text{mm}$.





4.7 Corner Aluminum Profile (Applicable to Injection-moulded Connector Only)

4.7.1 L Shape Self-locking Aluminum Profile Ver. 2 (Using with the Clip)

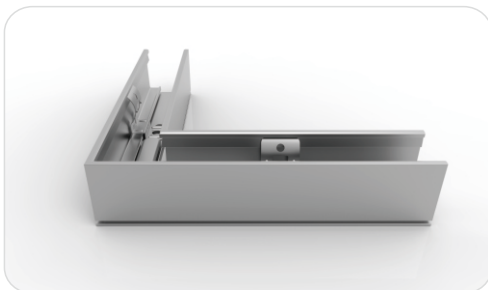

Model: NE-SQ-CH

Note: Unless otherwise stated, the tolerance of the profile is $\pm 0.5\text{mm}$.

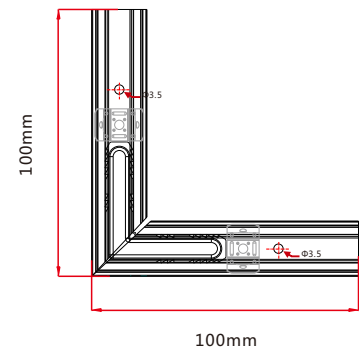



4.7.2 Inward L Shape Self-locking Aluminum Profile Ver.2 (Using with the Clip)




Model: NE-SQ-CH

Note: Unless otherwise stated, the tolerance of the profile is $\pm 0.5\text{mm}$.

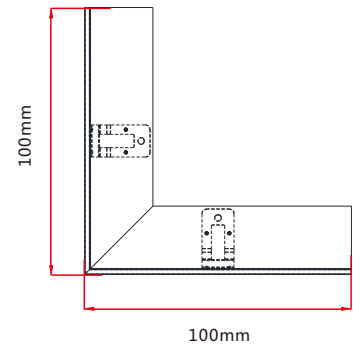



4.7.3 Outward L Shape Self-locking Aluminum Profile Ver.2 (Using with the Clip)

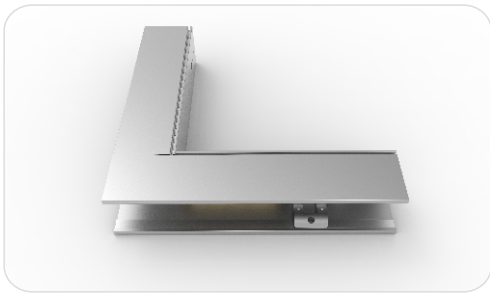


Model: NE-SQ-CH

Note: Unless otherwise stated, the tolerance of the profile is $\pm 0.5\text{mm}$.

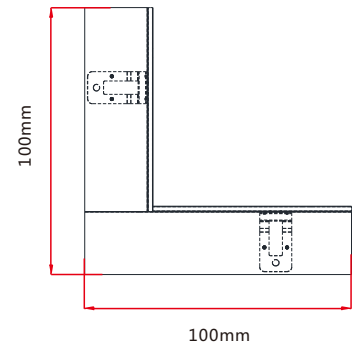



4.7.4 T Shape Self-locking Aluminum Profile Ver. 2 (Using with the Clip)

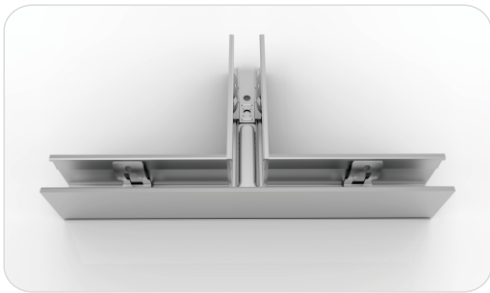

Model: NE-SQ-CH

Note: Unless otherwise stated, the tolerance of the profile is $\pm 0.5\text{mm}$.





4.7.5 X Shape Self-locking Aluminum Profile Ver. 2 (Using with the Clip)







Model: NE-SQ-CH

Note: Unless otherwise stated, the tolerance of the profile is $\pm 0.5\text{mm}$.

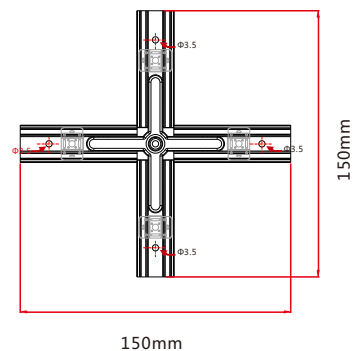

4.8 Curve Stainless Steel Profile

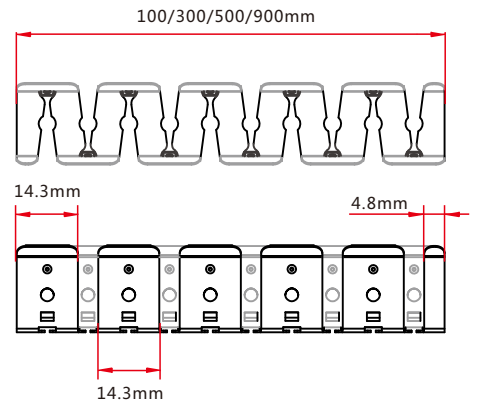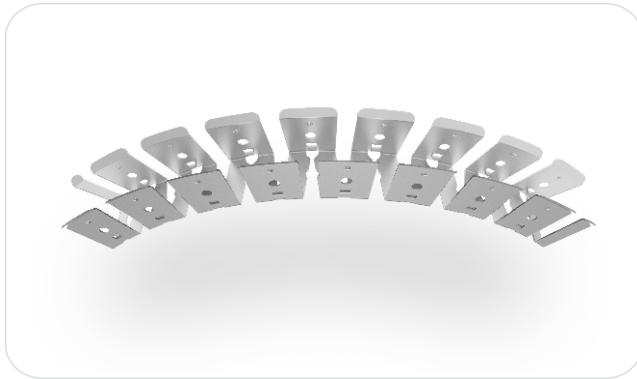


Model: NE-SQ-CH

Note: Unless otherwise stated, the tolerance of the profile is $\pm 0.5\text{mm}$.

5. Packaging

Packaging Method



Plastic Plate



White Box



Carton



Packaging Detail

Light Length	White Box Dimension (cm)	Carton Dimension (cm)	Numbers of White Box	Carton Weight (kg)
<4.5m	39*5.2*50	52*41*28	5	<8
5-8m	51*5.2*62	64*53*17.5	3	6-9
5-8m	51*5.2*62	64*53*28	5	9-14
10m	60*3.7*71	73*62*20	5	17
15m	68*5.2*79	81*70*12.5	2	11

6. Appendix

6.1 Certificate

Certificating Type	Testing Organization	Certificate Serial Number	Report Reference
UL 2108	UL	20160726-E360029	E360029-20130322
CE-EMC	SGS	SZEM1702001259LMV	SZEM160600421302

6.2 Third-Party Test Report



Testing Item	Testing Organization	Report Number
RoHS	SGS	CANEC1202163502 A01
IP68: Screw type	TUV SUD	68.140.12.136.02
IP68: Clasp type	SGS	GZES140200135301 GZES140200135401 GZES140200135501 GZES140200135701 GZES140200135801
IPX8: Molding type	SGS	SZES141200357301 SZES141200357401 SZES141200357501
IPX8: Snap type	SGS	GZES160600792031
Flame retardant	TUV SUD	68.140.13.068.01
UV@340nm: Light	AOV	A002R130308065—1R01
UV@340nm: PVC	AOV	A002R130308065—2R01

>>Note: The testing reports and certificates are available from the related official website.


6.3 Reliability Test of Light

TESTING ITEM	PERFORMANCE	STANDARD/REFERENCE VALUE/DESCRIPTION
PHOTOMETRIC TESTING	Spectrum Analysis	IES LM 79 (lumen, CCT, CRI, XY, SDCM, wave length)
	Photometric Distribution	IES LM 79(lumen intensity distribution & Lux diagram)
	Lumen maintenance & Life time	IES LM84 & IES TM28
TEMPERATURE RISE TESTING	Normal Temperature Test	UL1598 & UL2388 & IEC60598-1 & IEC60598-2-21
	Abnormal Operation Test	UL1598 & UL2388 & IEC60598-1 & IEC60598-2-21
MECHANICS & PHYSICS TESTING	Bending Test	Manufacturer-defined, 500 cycles
	Swing Test	UL2388, >750 cycles
	Tensile Test	Manufacturer-defined, > the weight of light in
	Twist Test	maximum connection length with both ends feed
		Manufacturer-defined, >200 cycles
	Ball impact	UL1598 & UL2388 & IEC60598-1 & IEC60598-2-21
WEATHERING TESTING	IK07 IK08	IEC62262
	Swimming Pool Water Immersion Test	GB9667, PH6.8-7.6, free chlorine 0.3-0.6mg/L
	Sea Water Immersion Test	IEC60598-1, Salinity 4%
	Salt Spray Test	IEC68-2-11
ENVIROMENT TESTING	Outdoor Exposure	Manufacturer-defined
	Flame Resistant Test	UL94
ENVIROMENT TESTING	UV Exposure Test	ASTMG 154 , ISO 4892-3 , UVA@340nm
	IPX5 IPX6 IPX7 IPX8	IEC60529
	ENDURANCE & THERMAL TEST LAB	Temperature Shock Test
Constant Temperature Test		Manufacturer-defined , 70°C (typical temperature)


6.4 Figures of Typical Characteristics

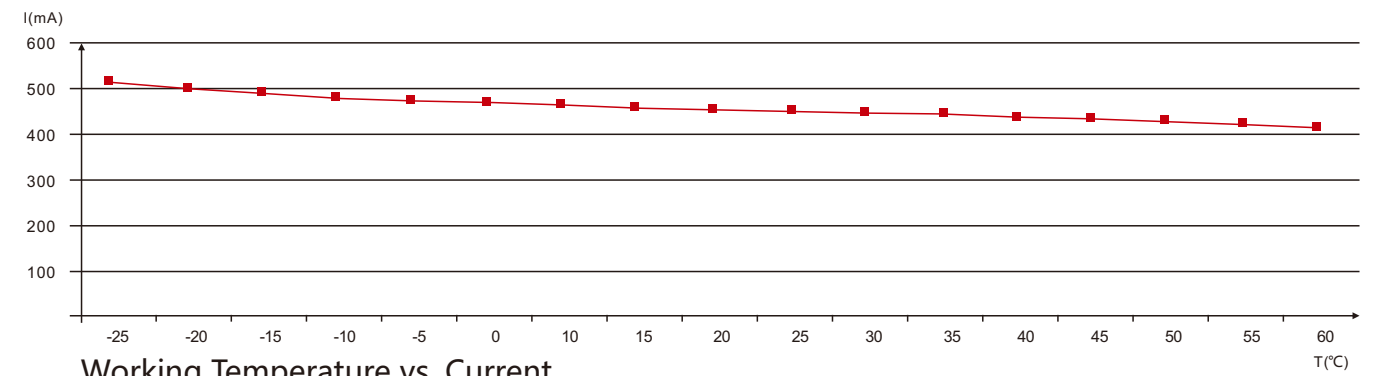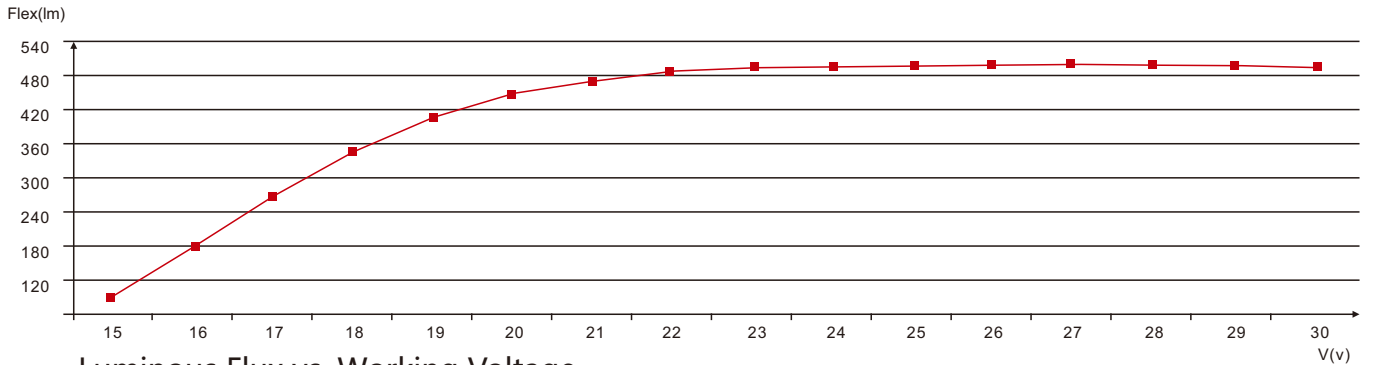

6.5 (X,Y) Chromaticity Diagram

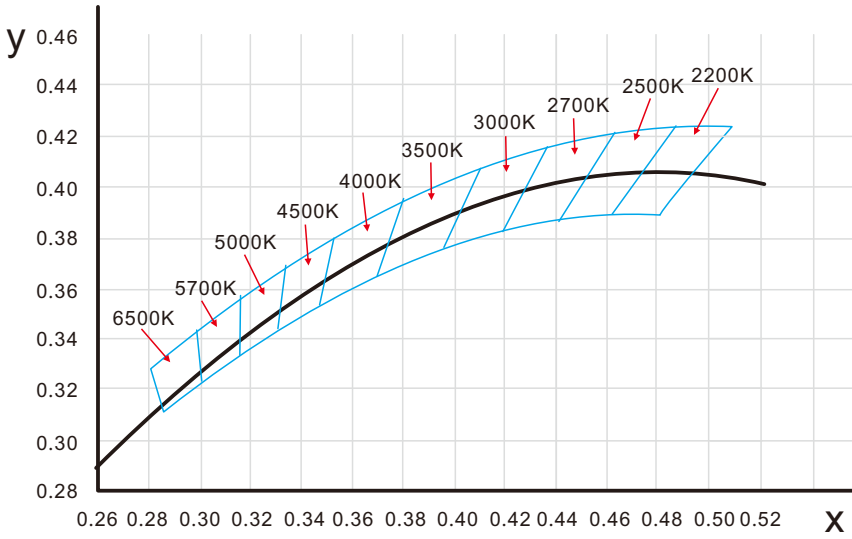

6.6 Wavelength of Colour Light

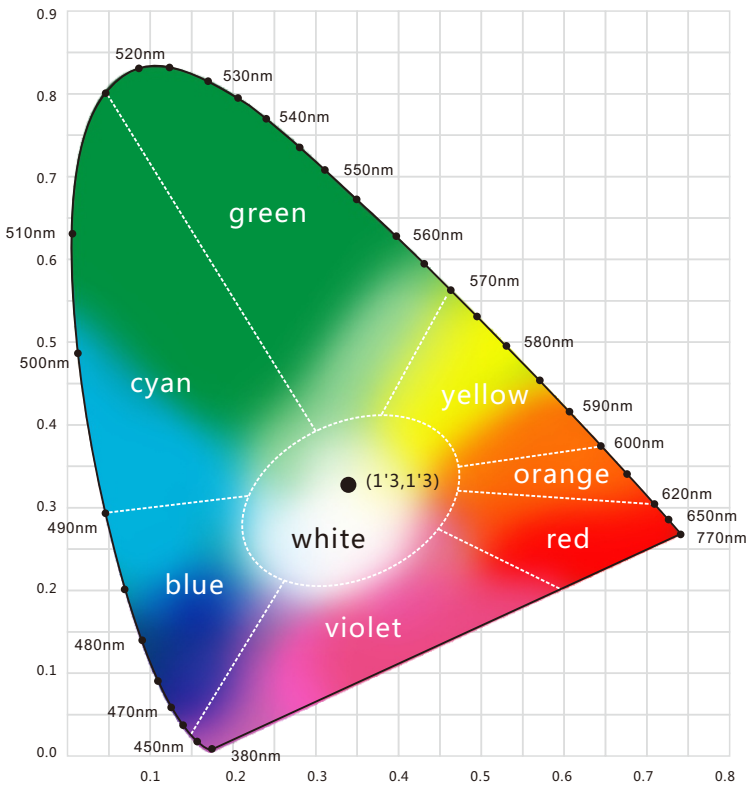

Light Color

- Red**
620-630nm

- Green**
520-530nm

- Blue**
465-475nm

6.7 Correlated Colour

Temperature ANSI STANDARD



Nominal CCT Categories

Nominal CCT	Target CCT and tolerance(K)	Target D_{uv}	D_{uv} Tolerance Range
2200K	2238 ±102	0.0000	Tx:CCT of the source
2500K	2460±120	0.0000	For Tx<2870K
2700K	2725 ±145	0.0000	0.000±0.0060
3000K	3045±175	0.0001	For Tx≥2870K
3500K	3465±245	0.0005	$D_{uv}(Tx)±0.0060$
4000K	3985±275	0.0010	where
4500K	4503±243	0.0015	$D_{uv}(Tx)=57700 \times (1/Tx)^2$
5000K	5029±283	0.0020	-44.6 x (1/Tx)
5700K	5667±355	0.0025	+0.00854
6500K	6532±510	0.0031	
Flexible CCT (2200-6500K)	$T_F^{1)} \pm \Delta T^{2)}$	$D_{uv} T_F^{3)}$	

Remark:

- 1) T_F is chosen to be at 100K steps (2300,2400,.....,6400K),excluding the ten nominal CCTs listed in Table 1.
- 2) $\Delta T = 1.1900 \times 10^8 \times T^3 - 1.5434 \times 10^8 \times T^2 + 0.7168 \times T - 902.55$
- 3) Same as in the D_{uv} Tolerance Range.

6.8 Loading Chart

Type.	Rated Power /m	Power Supply											
		35w	60w	75w	80w	100w	120w	150w	120w	150w	185w	240w	320w
NE-SQ	8w	3.5m	6m	7.5m	8m	10m	12m	15m			18.5m	24m	30m
	12w	2m	4m	5m	5m	6.5m	8m	10m			12m	16m	20m
	15w/16.5w	1.5m	3m	3.5m	4m	4.5m			5.5m	7m	9m	10m	
	22w	1m	2m	2m	3m	3.5m	4m	5m			6.5m	8.5m	10m
Energizing way													

- Note : 1. These are the light maximum recommended running length subject to selected power supply.
 2. For example: It is recommended to use one 80W power supply loading maximum 8m light (8w/m) or maximum 5m light (12w/m) by energizing the light one end.